

SOLVER.

PRODUCT CARD

Short name

DEC-WPCK-(1000)



Full name

Hidden T clip for WPC decking

BASE DATA

Product group	Deck-Dry
Application	• wpc decking boards
Code	301.010511

EAN

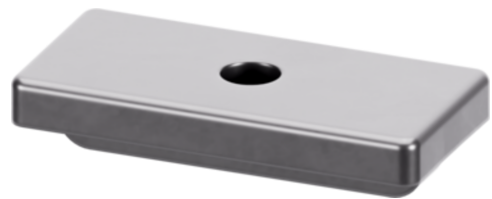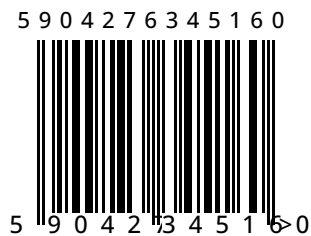

TECHNICAL DATA

Minimum height	0 mm
Maximum height	0 mm
Total dimension - length	50 mm
Total dimension - width	24 mm
Total product dimensions - height	11 mm
Head diameter (top plate)	Ø 0 mm (0 cm2)
Base diameter	Ø 0 mm (0 cm2)
Weight	~0.01 kg
Wytrzymałość na obciążenia do	0 kg
Fire resistance	E
Temperature range	od -20°C do 65°C

SOLVER.

Solver SP. Z O.O.
www.solver-systems.pl

phone: +48 58 585 97 37
email: sales@solver-systems.com

Wenus 73A,
80-299 Gdańsk, Poland

Color	black
Mandatory warranty	Limited 10-year residential and commercial warranty
Country of origin	Poland
Material name	Polypropylene - black regrind
Percentage of recycled material	100 %
Type of waste	• non-hazardous waste - recyclable
Project type	• exterior use
What finishing materials can be used • wooden decking boards	

Consists of
Universal clip WPC

CERTIFICATES

Product certified by the Building Research Institute. NATIONAL TECHNICAL ASSESSMENT ITB-KOT-2022-2174



LOGISTICS INFORMATION

Package	Quantity Packaging Value	Package weight	Empty package weight	Palett	Number of packages on a pallet	Number of pieces on a pallet	Pallet weight	Empty pallet weight
BOX 300x250x200	1000	9 kg	0.24 kg	WOODEN PALLET 120x100x220	160	160000	1496 kg	18 kg

Characteristic features

Patented terrace installation system that increases the durability of decking boards

Product features:

1. Sets an even 6.5 mm gap between WPC deck boards
2. Fits most WPC deck board models with side groove

Application

Designed for raised deck terraces with wooden boards, where an elevated level of durability and resistance to rot is required.

Invisible board mounting from underneath - boards are not damaged by screws from the top.

Used for composite decking terraces

Advantages

Product advantages:

1. The clip is installed in the gap and is invisible
2. Boards are not damaged by screws from the top
3. Durable attachment of boards to joists

Installation recommendations

Place mounting clips on the joist at the board and slide them into the board's side groove. Push the next board by sliding its side groove into the clip. Secure the clips to the joists using screws. The clips should press the board's wings against the joists. The clips create an expansion joint with a width in the range of 6-7 mm.

Tools

Cordless screwdriver. Screwdriver bit set. Drill bits. Pencil. Safety glasses. Safety gloves. Safety footwear.

Recommendations for use

Regular maintenance and cleaning of the gaps between the boards. Damaged or stained boards can be replaced.